



INTERIOR LED RECESSED DOWN SPOTLIGHT

L03022

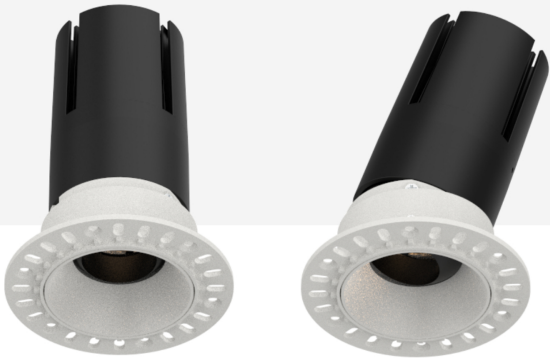

- IP44
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium material and powder coating.
- Ceiling recessed, Plaster -in. Trimless
- Same appearance both Fixed and 25°adjustable
- CITIZEN COB LED 3SDCM CRI90+
- Flicker Free, Remote LED Driver version.
- Deeply recessed light source. High level of visual comfort.
- 0/1-10V I Triac I DALI Tunable white dimming.

UNIFORM DISTRIBUTION AND SOFT LIGHT



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03022 -7	7W	450lm	Ø 75xH105mm	Ø 55mm	150mA
L03022 -10	10W	650lm	Ø 75xH105mm	Ø 55mm	250mA

FEATURES

Aluminium material and powder coating. Remote LED driver version. High level of visual comfort. The trimless adjustable spotlight is one of new developments. Same appearance both Fixed and Adjustable with decorative metal baffle. 25°adjustable, LED modular design, comprise a LED light module, a metal baffle and a mounting frame. One housing, multiple options, with different light distributions for a wide variety of applications. Easy installations. Visual comfort low glare optic with recessed light source. High Definition optical lenses in thermoplastic material. The lock connection design between the installation kit and the spotlight ensures safety. and invisible transition between the fixture and the ceiling. Customized color finishing, power changes are possible depending on the request and the quantity. Dimmable

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 10W 250mA	 Hex Louver	 15°  24°  38°  55°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized